


# 12" Wide UV Light-Curing Conveyor

## with Multiple Lamp and Part Clearance Options

The Dymax UVCS series conveyors are designed for curing UV light-curable adhesives, resins, inks, and coatings. These 12" wide conveyors can be outfitted with up to four Dymax 5000-EC lamps or up to two, six-inch microwave lamps. They offer complete shielding from UV light and consistent cure times. The lamp options allow matching intensity requirements to keep operating costs to a minimum. Standard height clearance is 4 inches; optional risers increase clearance to either 6 or 10 inches.

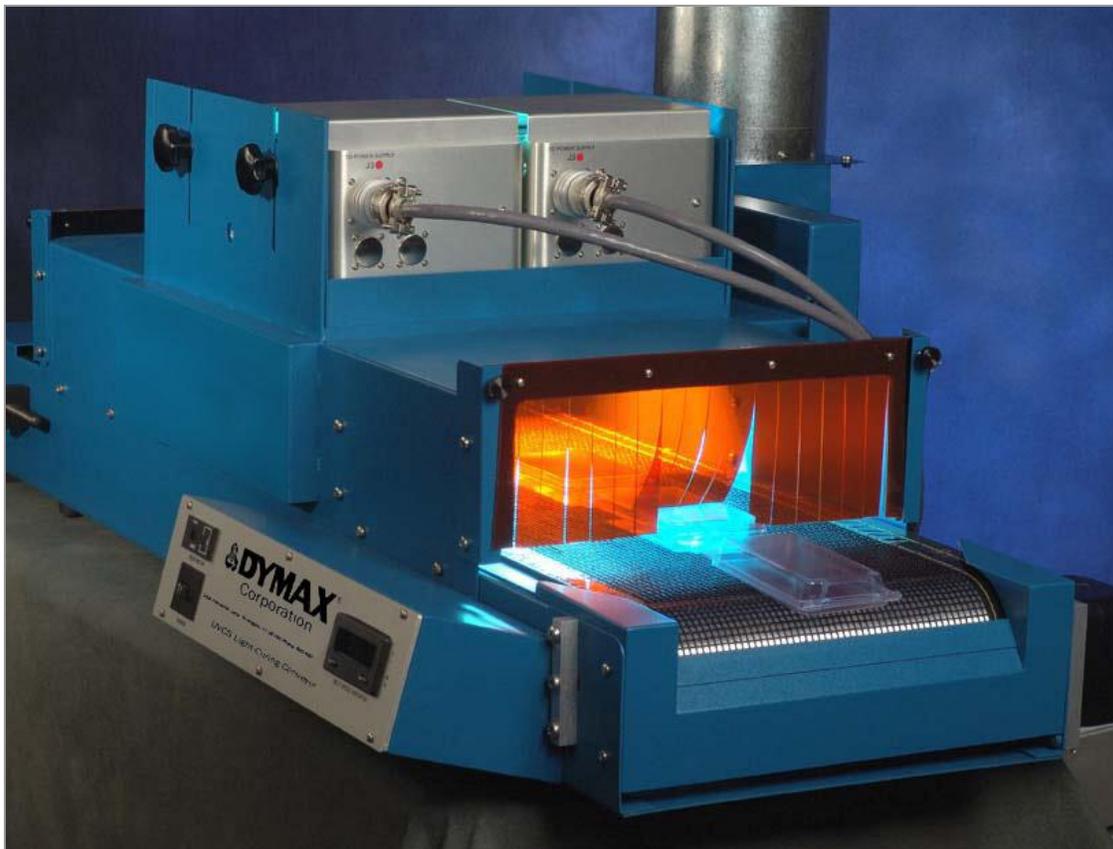

<b>FEATURES</b>	
Complete UV shielding	Built-in exhaust fan and stack
Controlled and consistent cure times	Integral vacuum hold-down and cooling system
Accepts parts up to 12" x 36"	Accurate digital belt control and readout
4", 6", or 10" vertical clearance available	Adjustable lamp-to-belt distance
12" belt width (guides available to channel parts into center 6")	Bench-top conveyor (with optional transportation carrying cart)


## Choosing the Right Lamp(s)

UVCS series conveyors can be outfitted with either 5000-EC lamps or Fusion F300 lamps.


### 5000-EC LAMPS

These lamps provide moderate intensity ( $\sim 200 \text{ mW/cm}^2$ ) over a 6" x 6" (approximate) curing area. Their 400-Watt auto-switching power supplies accept 90 to 264 Volts AC and 47 to 63 Hz. With normal use, 5000-EC bulbs will retain approximately 90% of their original intensity after 1,000 hours. 5000-EC lamps are recommended for small-to-medium throughput bonding applications. For faster or more tack-free cures, Fusion F300 lamps are recommended.


UVCS series conveyors can be outfitted with one, two, or four 5000-EC lamps as shown in the diagrams below.

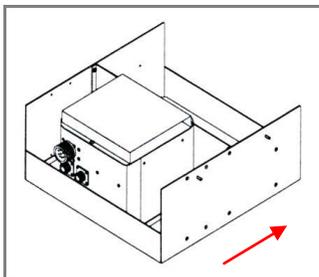


One 5000-EC lamp  
center-mounted  
6" wide single exposure

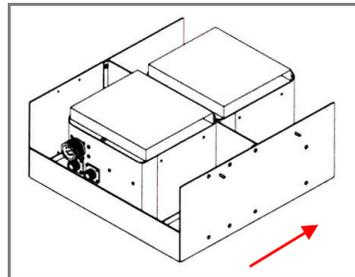

Two 5000-EC lamps  
center-mounted  
6" wide double exposure

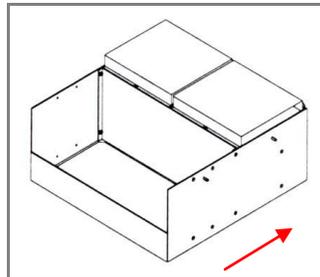

Two 5000-EC lamps  
full-width mounted  
12" wide single exposure

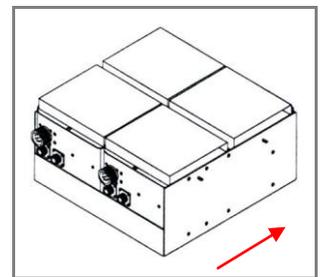


Four 5000-EC lamps  
full-width mounted  
12" wide double exposure


### FUSION F300 LAMPS

These lamps provide the highest intensity ( $\sim 2,500 \text{ mW/cm}^2$ ) over a 1" x 6" curing area. Fusion F300 lamps require 220/230 Volts AC. With normal use, Fusion F300 lamps retain 80% of their intensity up to 5000 hours. Fusion F300 lamps are recommended for most coating, potting, and gasketing applications and all high throughput applications.


UVCS series conveyors can be outfitted with one or two Fusion F300 lamps as shown in the diagrams below.

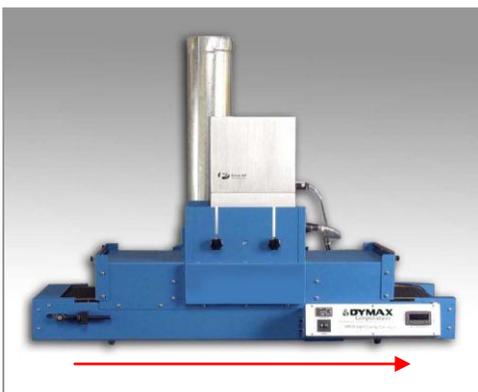

UVCS conveyor with one center-mounted Fusion

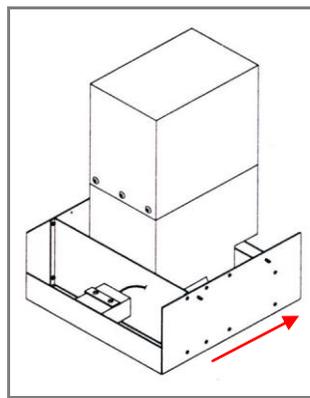

One center-mounted Fusion F300  
6" wide single exposure

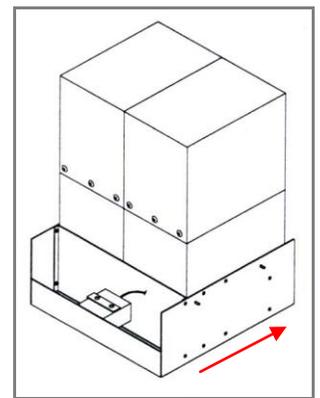

Two full-width mounted  
Fusion F300s  
12" wide single exposure

## 5000-EC and F300 Lamp Specifications and Features

	5000-EC LAMPS								FUSION F300 LAMPS	
	UVCS-D5-1-120	UVCS-D5-1-230	UVCS-D5-2A-120	UVCS-D5-2A-230	UVCS-D5-2B-120	UVCS-D5-2B-230	UVCS-D5-4-120	UVCS-D5-4-230	UVCS-F-1-230	UVCS-F-2-230
<b>Part Number</b>	39060	39065	39070	39075	39080	39085	39100	39105	39150	39160
<b>Belt Width</b>	12"								12"	
<b>Lamps</b> 5000-EC Fusion F300	1*		2*		2		4		1*	2
<b>Lamp Orientation</b> CM = center mounted FW = full width	CM				FW				CM	FW
<b>Width of Illuminated Area</b>	6"				12"				6"	12"
<b>Maximum UVA Intensity</b> (320-390 nm)	200 mW/cm <sup>2</sup>								2,500 mW/cm <sup>2</sup>	
<b>Maximum UVA Energy</b> (320-390 nm) @ 5 fpm (J/cm <sup>2</sup> )	1.25		2.50		1.25		2.50		2	
<b>Shipping Weight</b> with Crates (lbs. [kg])	390 [177]		410 [186]				450 [204]		475 [216]	580 [263]
<b>Belt Speeds</b> (feet per minute)	1-32 fpm								1-32 fpm	
<b>Voltage (VAC)</b>	120V	220/230V	120V	220/230V	120V	220/230V	120V	220/230V	220/230V	
<b>Amperage</b>	9.6	4.8	17.6	8.8	17.6	8.8	33.6	16.8	16	32.6
<b>Replacement Bulbs</b> Metal Halide (Standard) #38560 Mercury #36970** "D" Bulb (Standard) #36399 "H" Bulb #36441**	X X	X X	X X	X X	X X	X X	X X	X X	X X	X X

\*These conveyors have center-mounted lamps and are supplied with removable guides to channel parts into middle 6" of conveyor.

\*\*These bulbs are primarily designed for curing UV inks and cationic epoxies.

## Overall Dimensions For All UVCS Conveyors

- 50.5" 128 cm long
- 16.4" 42 cm high
- 29.8" 76 cm wide (from control panel to rear of blower)

UVCS conveyors are available without lamps for those customers that have previously purchased 5000-EC or Fusion F300 lamps. Additional lamps may be incorporated into UVCS conveyors after initial purchase (from one or two Fusion lamps, or up to four 5000-ECs). Contact Dymax Application Engineering for configuration assistance.

## Accessories and Replacement Parts

### ACCESSORIES


ACCU-CAL™ 150 Radiometer	1	<b>40550</b>
Risers Kit 2"	Pair	<b>39218</b>
Risers Kit 6"	Pair	<b>39280</b>
Transportation Cart	1	<b>39215</b>
Guides for 6" Curing	1	<b>39277</b>

### REPLACEMENT PARTS


Acrylic Tunnel Shield	1	<b>39205</b>
Tunnel Light Curtain	1	<b>39207</b>
Replacement Belt	1	<b>39134</b>
Extension Shield	1	<b>39209</b>
5000-EC (for conveyors)	1	<b>39241</b>




Transportation Cart

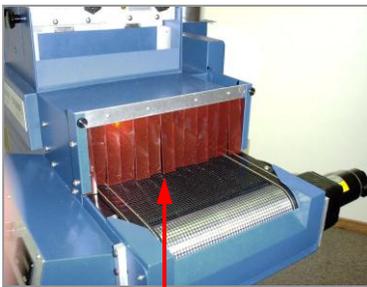

Tunnel Light Curtain

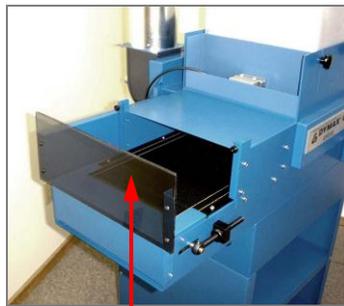

Extension Shield

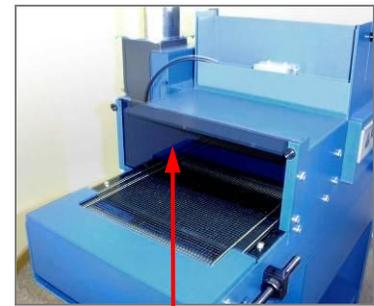

Acrylic Tunnel Shield



© 2006-2012 Dymax Corporation. All rights reserved. All trademarks in this guide, except where noted, are the property of, or used under license by Dymax Corporation, U.S.A.

Please note that most dispensing and curing system applications are unique. Dymax does not warrant the fitness of the product for the intended application. Any warranty applicable to the product, its application and use is strictly limited to that contained in Dymax's standard Conditions of Sale. Dymax recommends that any intended application be evaluated and tested by the user to insure that desired performance criteria are satisfied. Dymax is willing to assist users in their performance testing and evaluation by offering equipment trial rental and leasing programs to assist in such testing and evaluations. Data sheets are available for valve controllers or pressure pots upon request. LIT051A 11/20/2012

Dymax Corporation  
860.482.1010  
info@dymax.com  
[www.dymax.com](http://www.dymax.com)

Dymax Oligomers & Coatings  
860.626.7006  
oligomers&coatings@dymax.com  
[www.dymax-oc.com](http://www.dymax-oc.com)

Dymax Europe GmbH  
+49 (0) 611.962.7900  
info\_de@dymax.com  
[www.dymax.de](http://www.dymax.de)

Dymax UV Adhesives & Equipment (Shenzhen) Co Ltd  
+86.755.83485759  
dymaxasia@dymax.com  
[www.dymax.com.cn](http://www.dymax.com.cn)

Dymax UV Adhesives & Equipment (Shanghai) Co Ltd  
+86.21.37285759  
dymaxasia@dymax.com  
[www.dymax.com.cn](http://www.dymax.com.cn)

Dymax Asia (H.K.) Limited  
+852.2460.7038  
dymaxasia@dymax.com  
[www.dymax.com.cn](http://www.dymax.com.cn)

Dymax Korea LLC  
82.2.784.3434  
info@dymax.kr  
[www.dymax.co.kr](http://www.dymax.co.kr)