

LW05 Gelcoaters



MODEL SHOWN: LW05-5C
COMPLETE W/ 25 FT. HOSE SET

* LOW EMISSIONS

* FAMOUS X-GUN[®] WITH
AIR TRIGGER

* EXTERNAL-MIX

* SOFT SPRAY PATTERN

* NO LEAD-NO LAG

* LOW MAINTENANCE

* GS MEKP SLAVE SYSTEM

* PAIL MOUNTED UNITS

* PORTABLE - 5 or 55

* MULTI COLOR UNITS WITH
NO SOLVENT PURGE
EASY COLOR CHANGE

* OPTIONAL HEATERS

SPECS ON MODEL SHOWN ABOVE:

AIR - 100 PSI @ 10 CFM

PUMP - 15:1 RATIO @ 1 GPM W/ SIPHON ASSEM.

HOSES - 25 FT.

MEKP - .5 - 4% SIPHON FROM ORIGINAL BOTTLE



MADE IN U.S.A.

GS MANUFACTURING



Phone: 949-642-1500

Fax: 949-631-6770



985 W. 18th Street
Costa Mesa, CA 92627

Web site: www.gsmfg.com

E-mail: gsmfg@pacbell.net

X2007GL LOW EMISSION Gelcoat gun

Lightweight X-GUN® * Superior surface quality * Low emissions
Single gelcoat orifice * Less nozzle blockage * Single MEKP orifice

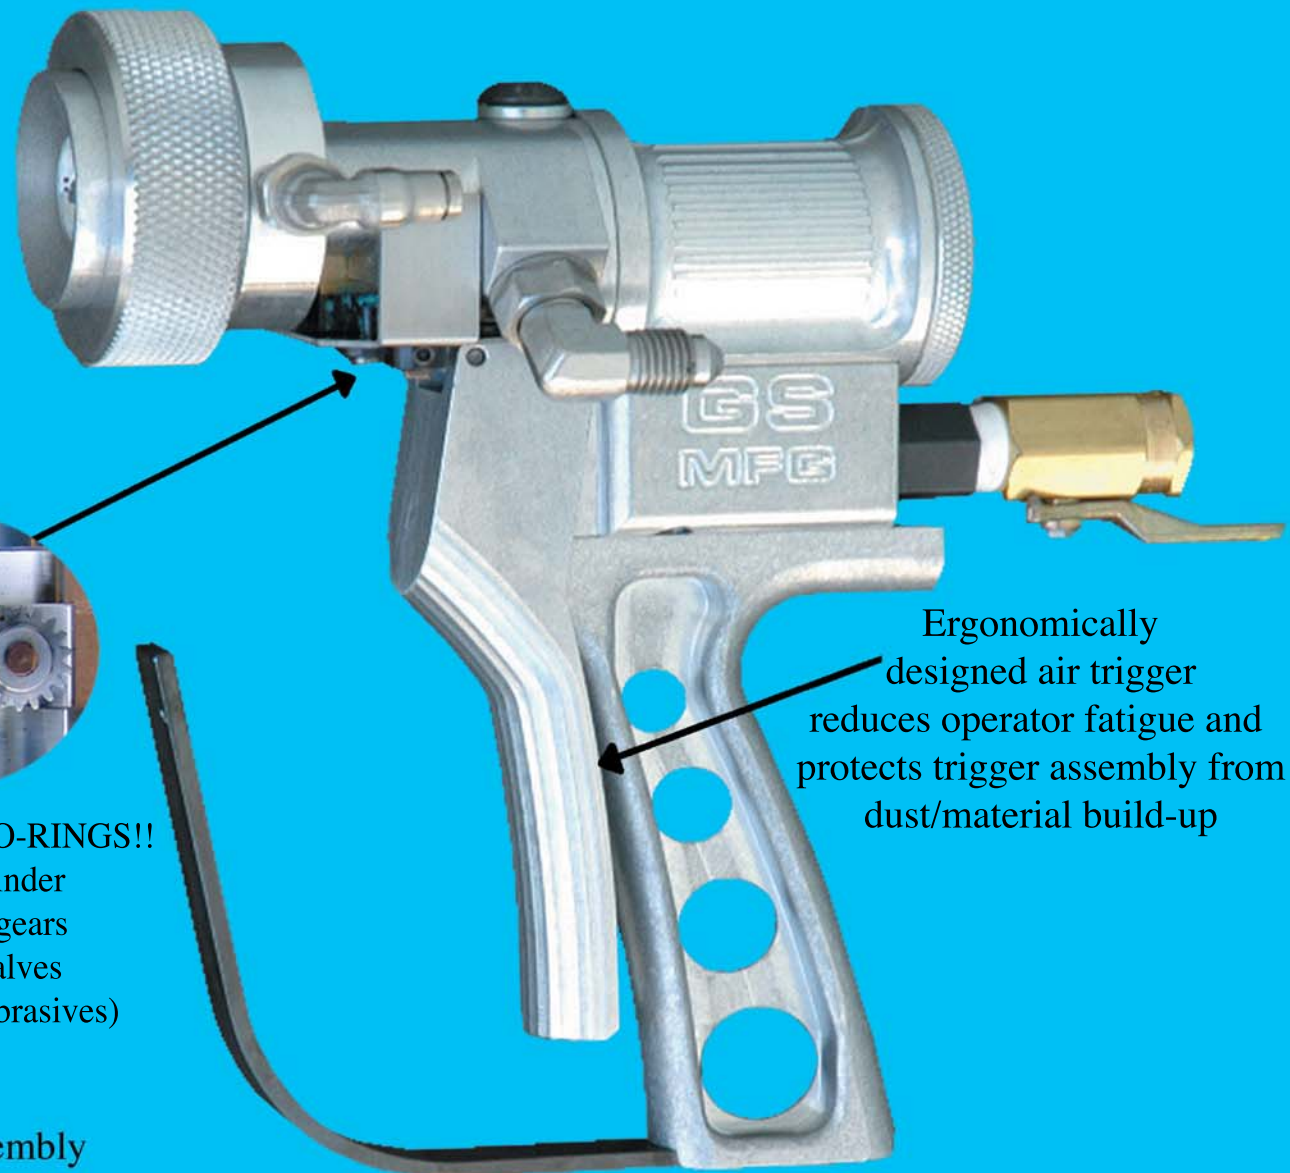

NO NEEDLES/NO O-RINGS!!
pneumatic cylinder
activates rack/gears
to open ball valves
(coated balls for abrasives)

Ergonomically
designed air trigger
reduces operator fatigue and
protects trigger assembly from
dust/material build-up

MODEL X2007GL

- * Easy disassembly
- * Modular components
- * Low pressure pneumatic controls

Leading edge technology in
LOW-EMISSION resin/gelcoat application

- Standard components:**
- X2007GL Low emission gel gun
 - S1000-97 MEKP Slave pump assembly
 - 25 Foot hose set
 - All regulators/hardware

- System specifications:**
- Output 1-8 lbs./min.(.45-3.6 kg/min.)
 - Catalyst .75% to 2.5% by volume
 - Pump ratios 15:1 or 22:1
 - Air consumption 5-7 CFM

- Options:**
- Additional hose lengths
 - 55 Gallon drum
 - Stationary gel pump mast
 - Multi-color units
 - Internal mix nozzle